


## Heaters

### HT20 Indirect fired Heater

Low noise indirect oil fired heater with a heating capacity of 200 kW. This low-energy machine is ready for use. The machine is mounted in a robust frame and can be moved easily with a forklift or crane.

#### Technical specifications HT20

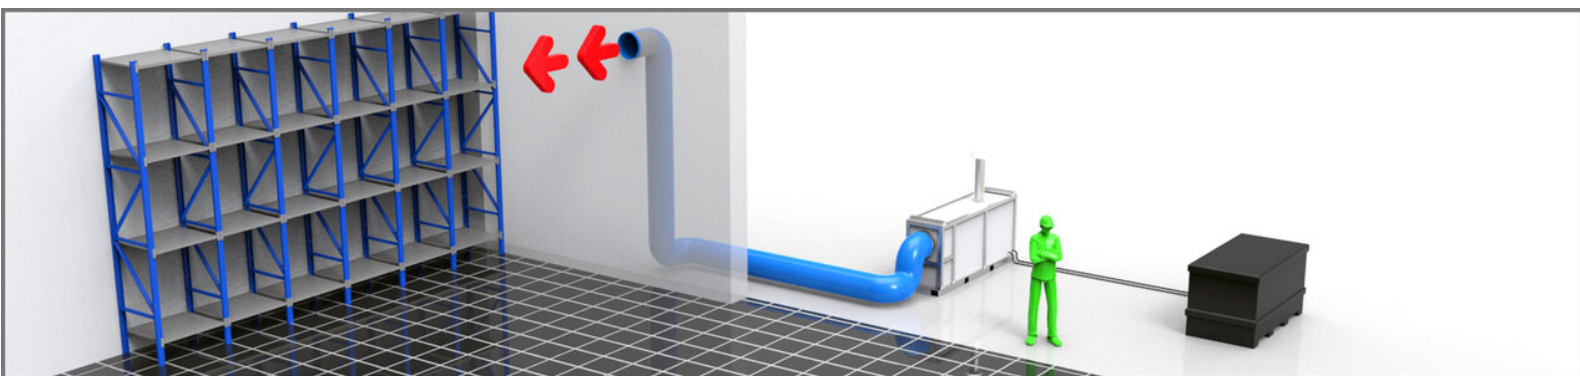

Heating capacity	200 kW	Weight	605 kg	Flow nominal (L/sec)	21.33 L/sec
Power connection	16/32 A CEE	Current (nominal)	9 A	Maximum working pressure	10 bar
Voltage	400 V	Max. air flow	12000 m <sup>3</sup> /h	Recommended fuses	630 A
Phases	3 + PE	External (Air) pressure	600 Pa	Controller	Thermost.
Length	3000 mm	Power consumption	232 kW	Sound level (at 10 m)	56 dB(A)
Width	810 mm	Recommended Fuses	16 A		
Height	1360 mm	Nominal pressure drop	30 kPa		