




Cold stores

KC03 Cold storage cell

Ready-for-use mobile cold storage cell with a volume of 10 m³ and a large refrigeration capacity (overcapacity). The cold storage cell has been fitted with a flat anti-skid floor, lighting, a door that opens smoothly (also from the inside), and has a very low entry height. The cold storage cell meets the HACCP/GMP requirements and is easy to install, even in locations that are difficult to reach, as well indoors as outdoors. The storage cell is low noise and low power.

Technical specifications **KC03**

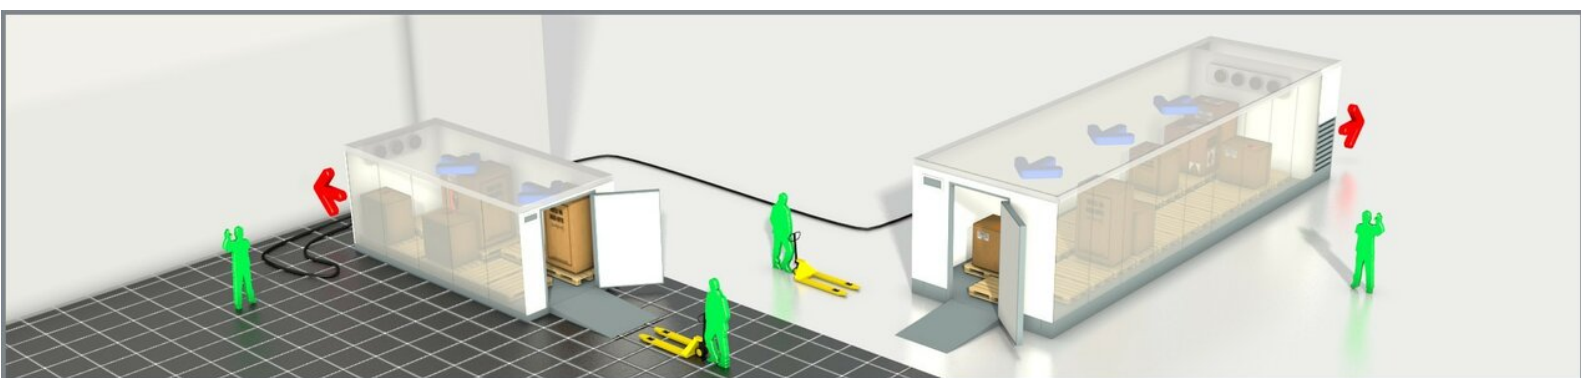

Amount of pallets (euro)	3	Length (external)	2000 mm	Min. outside temperature	-20 °C
Volume	10 m ³	Width (external)	2500 mm	Current (nominal)	4.7 A
Min. inside temperature	-2 °C	Height (external)	2500 mm	Current (max)	7.2 A
Max. inside temperature	10 °C	Door height	2100 mm	Length (internal)	1840 mm
Power connection	Schuko 230V	Door width	900 mm	Width (internal)	2340 mm
Voltage	230 V	Threshold height	160 mm	Height (internal)	2260 mm
Recommended fuses	16 A	Weight	750 kg	Max. load	420 Kg/m ²
Phases	1 + N + PE	Sound level (at 10 m)	38 dB(A)		