




## Airhandlers

### LU02L Low temp airhandler

Water-cooled ventilation unit with a 27 kW cooling capacity, fitted with ventilation control. The frequency controlled unit has a defrost device, making it suitable for low-temperature applications as well. This system can also be used as a heater (capacity: 14 kW). The low temp airhandler is ready for use and easy to install with its quick-connectors. The unit is easy to move with a pallet cart or forklift.

#### Technical specifications LU02L

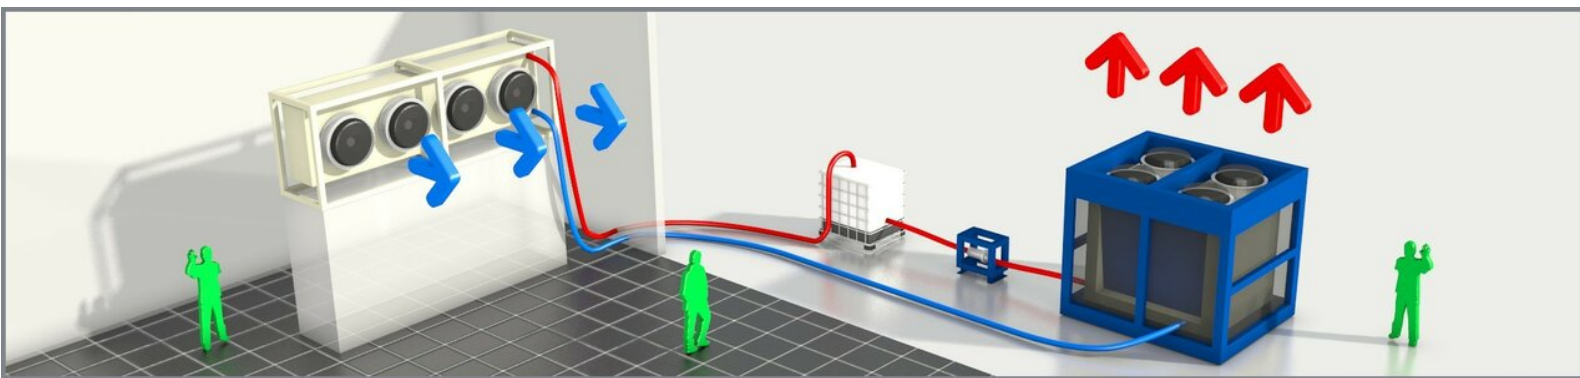

Cooling capacity <sup>1</sup>	27 kW	External (Air) pressure	130 Pa	Length	2940 mm
Current (nominal)	6.4 / 27 A	Power connection	16/32 A CEE	Width	1200 mm
Capacity steps	Freq. contr.	Recommended fuses	16/32 A	Height	1770 mm
Max. air flow	26000 m <sup>3</sup> /h	Phases	3 + PE	Weight	800 kg
Voltage	400 V	Water connection	2" Bauer	Sound level (at 10 m)	65 dB(A)

<sup>1</sup> Cooling: Water-Glycol 30% -10°C/-6°C, air 0° 60% RV