




## Ultra low freezers

### MU02 Ultra-low freezer unit

Representative, low-energy and lownoise cell constructed in accordance with HACCP & GMP requirements, with a volume of 71 m<sup>3</sup>. Especially developed for ultra-low temperatures down to minus 45 °C with a complete back-up cooling system. Ready for use and easy to install with a crane truck, even in locations that are difficult to reach. Can be used both outdoors and indoors. Uses ozone-friendly cooling agent. Accessible via door that can also be opened from the inside. Including lighting and door frame heating.

## Technical specifications MU02

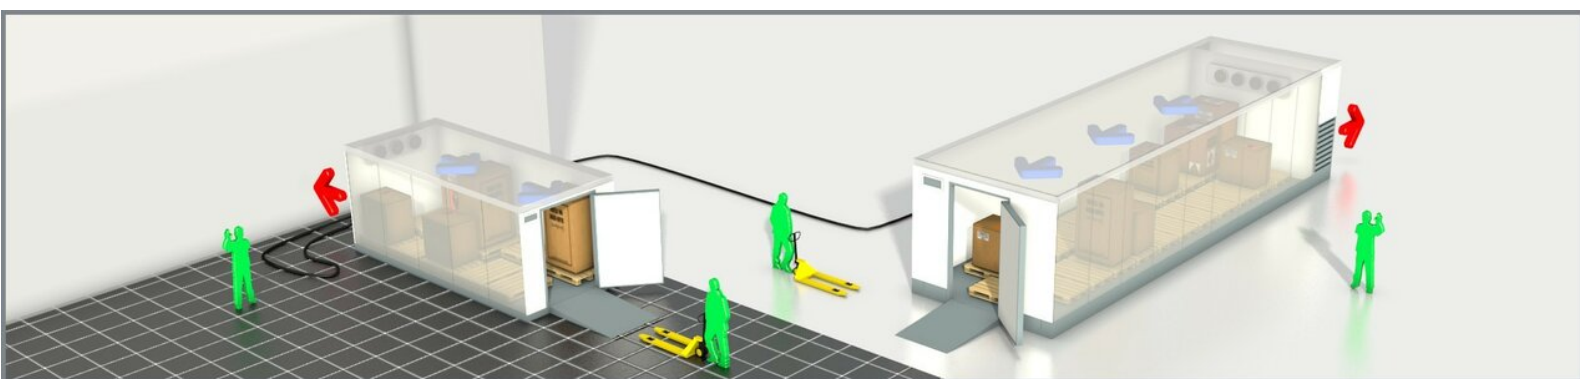

Amount of pallets (euro)	24	Current (nominal)	28.2 A	Height (internal)	2520 mm
Volume	71 m <sup>3</sup>	Recommended fuses <sup>1</sup>	2 x 63 A	Door height	2100 mm
Min. inside temperature	-45 °C	Phases	3 + N + PE	Door width	1400 mm
Max. inside temperature	-20 °C	Length (external)	12000 mm	Threshold height	290 mm
Min. outside temperature	-20 °C	Width (external)	3500 mm	Max. load	1200 Kg/m <sup>2</sup>
Power connection	2 x 63 A CEE	Height (external)	3000 mm	Weight	9500 kg
Voltage	400 V	Length (internal)	8900 mm	Sound level (at 10 m)	61 dB(A)
Current (max)	41.8 A	Width (internal)	3140 mm		