




Freezer rooms

MV01 Freezer unit

Ready-for-use mobile freezer unit with a volume of 84 m³ and a large freezing overcapacity (temperature range down to minus 35 °C*). The frozen storage cell has been fitted with a flat anti-skid floor, lighting, a door with frame heating that opens smoothly (also from the inside), and has a very low entry height. The frozen storage cell meets the HACCP/GMP requirements, and standard features include a data log system. Optional are wireless temperature control and monitoring. The unit is easy to install with a crane truck. This storage cell is low noise and low energy.

Technical specifications MV01

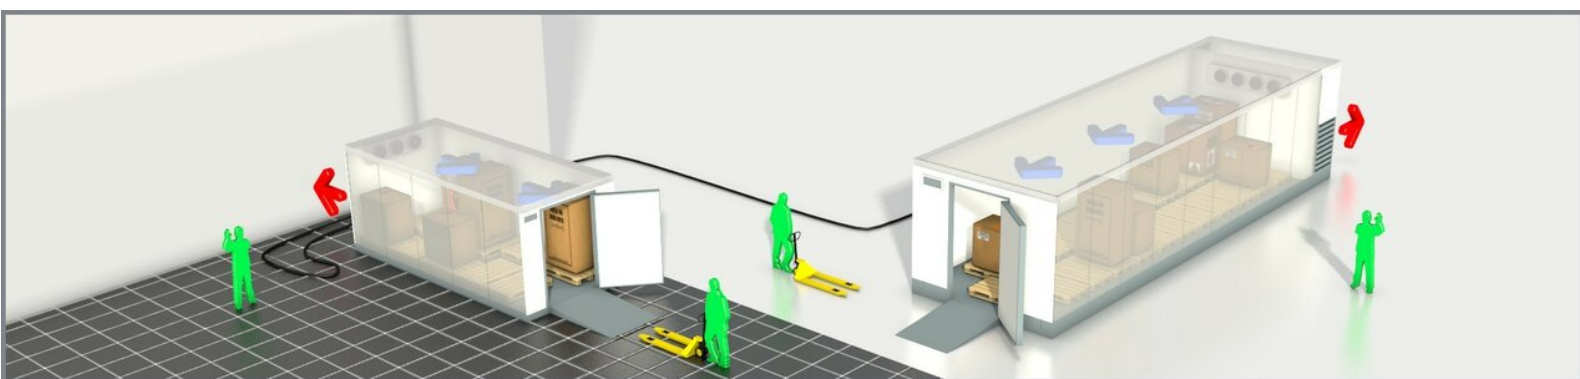

| | | | | | |
|--------------------------------------|-------------------|-------------------|------------|-----------------------|------------------------|
| Amount of pallets (euro) | 26 | Current (nominal) | 14.8 A | Height (internal) | 2700 mm |
| Volume | 84 m ³ | Recommended fuses | 25 A | Door height | 2500 mm |
| Min. inside temperature ¹ | -35 °C | Phases | 3 + N + PE | Door width | 1400 mm |
| Max. inside temperature | 2 °C | Length (external) | 12000 mm | Threshold height | 200 mm |
| Min. outside temperature | -20 °C | Width (external) | 3000 mm | Max. load | 1200 Kg/m ² |
| Power connection | 32 A CEE | Height (external) | 3000 mm | Weight | 6200 kg |
| Voltage | 400 V | Length (internal) | 10500 mm | Sound level (at 10 m) | 50 dB(A) |
| Current (max) | 21 A | Width (internal) | 2700 mm | | |

¹ After approval of Coolworld International