## **Coolw®rld**




Freezer rooms

## **MV03** Freezer unit

Ready-for-use mobile freezer unit with a volume of 100 m³ and a large freezing overcapacity (temperature range down to minus 35 °C\*). Thefrozen storage cell has been fitted with a flat anti-skid floor, lighting, a door with frame heating that opens smoothly (also from the inside), and has a very low entry height. The frozen storage cell meets the HACCP/GMP requirements, and standard features include a data log system. Optional are wireless temperature control and monitoring. The unit is easy to install with a crane truck. This storage cell is low noise and low energy.

## Technical specifications MV03

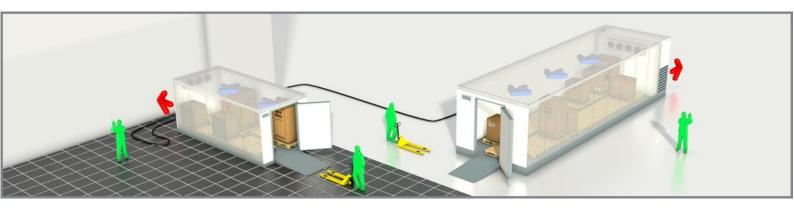

Amount of pallets (euro)	28
Volume	100 m <sup>3</sup>
Min. inside temperature <sup>1</sup>	-35 °C
Max. inside temperature	2 °C
Min. outside temperature	-20 °C
Power connection	32 A CEE
Voltage	400 V
Current (max)	21 A

Current (nominal)	14.8 A
Recommended fuses	25 A
Phases	3 + N + PE
Length (external)	12000 mm
Width (external)	3500 mm
Height (external)	3000 mm
Length (internal)	10500 mm
Width (internal)	3200 mm

Height (internal)	2700 mm
Door height	2500 mm
Door width	1400 mm
Threshold height	200 mm
Max. load	1200 Kg/m <sup>2</sup>
Weight	6700 kg
Sound level (at 10 m)	50 dB(A)

<sup>&</sup>lt;sup>1</sup> After approval of Coolworld International