




## Freezer rooms

### MV03 Freezer unit

Ready-for-use mobile freezer unit with a volume of 100 m<sup>3</sup> and a large freezing overcapacity (temperature range down to minus 35 °C\*). The frozen storage cell has been fitted with a flat anti-skid floor, lighting, a door with frame heating that opens smoothly (also from the inside), and has a very low entry height. The frozen storage cell meets the HACCP/GMP requirements, and standard features include a data log system. Optional are wireless temperature control and monitoring. The unit is easy to install with a crane truck. This storage cell is low noise and low energy.

### Technical specifications MV03

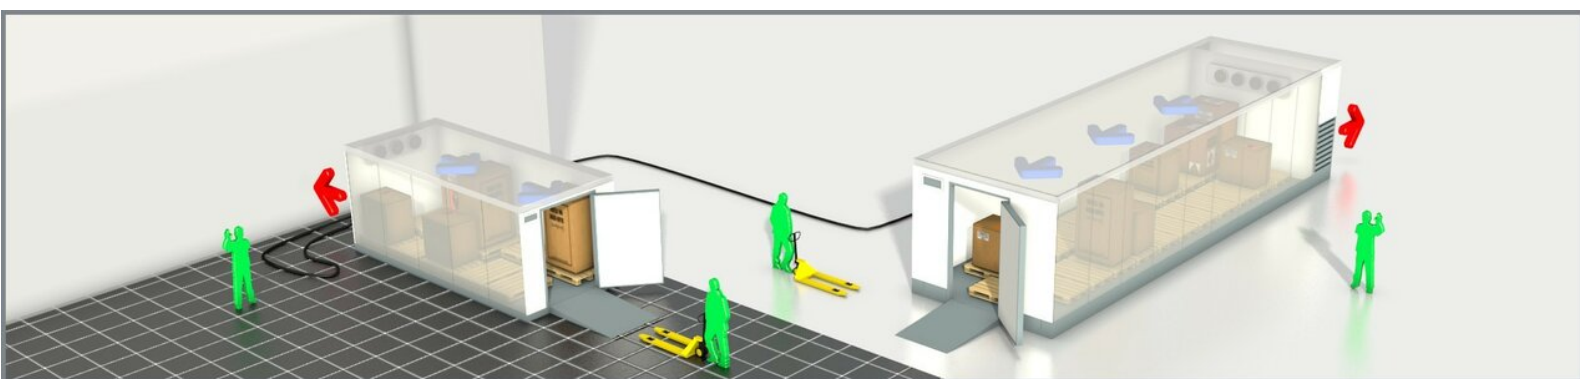

Amount of pallets (euro)	28	Current (nominal)	14.8 A	Height (internal)	2700 mm
Volume	100 m <sup>3</sup>	Recommended fuses	25 A	Door height	2500 mm
Min. inside temperature <sup>1</sup>	-35 °C	Phases	3 + N + PE	Door width	1400 mm
Max. inside temperature	2 °C	Length (external)	12000 mm	Threshold height	200 mm
Min. outside temperature	-20 °C	Width (external)	3500 mm	Max. load	1200 Kg/m <sup>2</sup>
Power connection	32 A CEE	Height (external)	3000 mm	Weight	6700 kg
Voltage	400 V	Length (internal)	10500 mm	Sound level (at 10 m)	50 dB(A)
Current (max)	21 A	Width (internal)	3200 mm		

<sup>1</sup> After approval of Coolworld International

